

Don't forget these facts about Acopian....

- 1. We ship within 3 Days (see our 3 Day Shipping Promise below).
- 2. Acopian power supplies last a *very long time*.
- 3. The Voltage Finder is the quickest way to find a power supply with the specs you need.
- 4. The Online System builder (www.acopian.com/SystemBuilder) is a convenient way to get your own custom Power System (and they ship within 9 Days).
- 5. You always talk to a real person when you call Acopian.
- 6. You can order your Acopian power supplies factory direct.
- 7. You can order your Acopian power supplies online.
- 8. All Acopian products are made in the USA.

Acopian

Acopian Technical Company • Easton, PA I-800-523-9478 • www.acopian.com Order Factory Direct Made in USA





Narrow Profile SINGLE OUTPUT

LINEAR REGULATED AC-DC

- Shipped Within 3 Days
- All Models U.L. Recognized
- Five Year Warranty

Where only a narrow mounting space is available, Acopian Narrow Profile power supplies fit where many others cannot. Choose from Series A (High Performance) and Series B (General Purpose) models with output ratings up to 150 volts, up to 3.5 amps.

SPECIFICATIONS

Input Voltage: 105-125 VAC, 50-400 Hz, single phase.

Output Specifications: See table.

Series A: Model numbers begin with the letter A. **Series B:** Model numbers begin with the letter B.

Remote Voltage Adjustment/Sensing: Standard in Series A, not available in Series B.

Polarity: Output is floating; either positive or negative terminal may be grounded or floated up to 300 volts above ground.

Temperature Coefficient:

Series A: 0.015%/°C (Typical). Series B: 0.02%/°C (Typical).

Ambient Operating Temperature:

Series A: -20 to +71°C. **Series B:** 0 to +71°C.

Storage Temperature: -55 to +85°C.

Overload/Short Circuit Protection:

Series A: Foldback current limiting with automatic recovery.

Series B: Input fuse and output current limiting.


OPTIONS

Overvoltage Protection: An internal preset overvoltage protector is available. To order, add prefix "V" to the model number and add \$25.00 to the standard price of models with outputs of 1 to 70 volts; \$35.00, for 75 to 150 volt outputs.

Terminal Strip Cover: Clips on. To order, add suffix "M" to model number and \$5.00 to price.

230 Volt Input: All models can be alternately furnished for operation on inputs of 210-250 VAC, 50-400 Hz. To order, add suffix "-230" to model number and \$25.00 to price. The "-230" option requires two additional days.



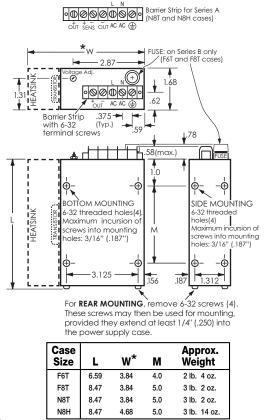

*W dimension includes TRANSISTOR on F6T, F8T, and N8T cases and HEATSINK on N8H case.

Mounting: Threaded mounting holes permit mounting to a chassis, cabinet wall or bracket, or they may be used on a test bench or tabletop. To mount from the power supply side of the mounting surface or for DIN rail mounting, see accessory Mounting Kits on page 91.



40


NARROW PROFILE SINGLE OUTPUT

Nominal Output Voltage	Ad-	Output Current			Regulation		Ripple			
	just ±V	40°C	Amps. a 55°C	π 71°C	Load ± %*	Line ± %*	mV RMS	(\$) Price	Model	Case Size
1	.5	2.2	2.1	2.0	.005	.005	.250	180	A1NT220	N8T
1	.5	3.5	3.5	3.0	.005	.005	.250	215	A1NT350	N8H
1.5 1.5	.5 .5	2.2 3.5	2.1 3.5	2.0 3.0	.005 .005	.005 .005	.250 .250	180 215	A1.5NT220 A1.5NT350	N8T N8H
2 2	.5 .5	2.2 3.0	2.1 3.0	2.0 3.0	.005 .005	.005 .005	.250 .250	180 215	A2NT220 A2NT300	N8T N8H
3	.5	1.0	1.0	1.0	.5	.1	1	150	B3TN100	F6T
3 3	.5 .5	2.2 3.5	2.1 3.5	2.0 3.0	.005 .005	.005 .005	.250 .250	180 215	A3NT220 A3NT350	N8T N8H
3.3	.5	1.0	1.0	1.0	.5	.1	1	150	B3.3TN100	F6T
3.3 3.3	.5 .5	2.2 3.5	2.1 3.5	2.0 3.0	.005 .005	.005 .005	.250 .250	180 215	A3.3NT220 A3.3NT350	N8T N8H
5	.5	1.0	1.0	1.0	.1	.1	1	145	B5TN100	F6T
5	.5	1.1	1.0	1.0	.005	.005	.250	155	A5TN110	N8T
5 5	.5 .5	2.2 3.5	2.1 3.5	2.0 3.0	.005 .005	.005 .005	.250 .250	180 215	A5NT220 A5NT350	N8T N8H
6	.5 .5	1.0	1.0	1.0	.005	.005	.230	150	B6TN100	F6T
6	.5 .5	2.2	2.1	2.0	.005	.005	.250	180	A6NT220	N8T
6	.5	2.7	2.7	2.7	.005	.005	.250	215	A6NT270	N8H
7	1	1.0	1.0	1.0	.1	.1	1	150	B7TN100	F6T
7 7	.5 .5	1.1 2.0	1.0 2.0	1.0 2.0	.005 .005	.005 .005	.250 .250	170 200	A7TN110 A7NT200	N8T N8H
8	1	1.0	1.0	1.0	.1	.1	1	150	B8TN100	F6T
8	.5	1.1	1.0	1.0	.005	.005	.250	170	A8TN110	N8T
8	.5	2.0	2.0	2.0	.005	.005	.250	200	A8NT200	N8H
9	1 .5	1.0 1.1	1.0 1.0	1.0 1.0	.1 .005	.1 .005	1 .250	150 170	B9TN100 A9TN110	F6T N8T
9 9	.5 .5	2.0	2.0	2.0	.005	.005	.250	200	A9NT200	N8H
10	1	1.0	1.0	1.0	.1	.1	1	155	B10TN100	F6T
10	.5	1.1	1.0	1.0	.005	.005	.250	170	A10TN110	N8T
10	.5	2.0	2.0	2.0	.005	.005	.250	200	A10NT200	N8H
11 11	1 .5	1.0 1.1	1.0 1.0	.750 1.0	.1 .005	.1 .005	1 .250	155 170	B11TN100 A11TN110	F6T N8T
11	.5 .5	2.0	2.0	2.0	.005	.005	.250	200	A11NT200	N8H
12	1	1.0	1.0	.750	.1	.1	1	155	B12TN100	F6T
12	.5	1.1	1.0	1.0	.005	.005	.250	170	A12TN110	N8T
12	.5 1	2.0	2.0	2.0 .750	.005	.005	.250 1	200	A12NT200 B13TN100	N8H
13 13	י 5.	1.0 1.1	1.0 1.0	1.0	.1 .005	.1 .005	.250	155 170	A13TN110	F6T N8T
13	.5	2.0	2.0	2.0	.005	.005	.250	200	A13NT200	N8H
14	1	1.0	1.0	.750	.1	.1	1	155	B14TN100	F6T
14 14	.5 .5	1.1 2.0	1.0 2.0	1.0 2.0	.005 .005	.005 .005	.250 .250	170 200	A14TN110 A14NT200	N8T N8H
14	.J 1	1.0	1.0	.750	.005	.005	.230	155	B15TN100	F6T
15	.5	1.1	1.0	1.0	.005	.005	.250	170	A15TN110	N8T
15	.5	2.0	2.0	2.0	.005	.005	.250	200	A15NT200	N8H
16	1	1.0	1.0	.750	.1	.1	1	155	B16TN100	F6T
16 16	.5 .5	1.0 1.75	1.0 1.75	1.0 1.75	.005 .005	.005 .005	.250 .250	170 200	A16TN100 A16NT175	N8T N8H
18	.0	.750	.750	.750	.1	.1	1	155	B18TN75	F6T
18	.5	1.0	1.0	1.0	.005	.005	.250	170	A18TN100	N8T
18	.5	1.5	1.5	1.5	.005	.005	.250	200	A18NT150	N8H
20 20	1 5	.500 .900	.500 .900	.500 .900	.1 .005	.1 .005	1 250	140 170	B20TN50 A20TN90	F6T N8T
20 20	.5 .5	.900 1.25	.900 1.25	.900 1.25	.005	.005	.250 .250	200	A201N90 A20NT125	N81 N8H
24	1	.750	.750	.750	.1	.1	1	155	B24TN75	F6T
24	.5	1.0	1.0	1.0	.005	.005	.250	180	A24TN100	N8T
24	.5	1.25	1.25	1.25	.005	.005	.250	205	A24NT125	N8H
25 25	1 .5	.750 .750	.750 .750	.750 .750	.1 .005	.05 .005	1 .250	155 180	B25TN75 A25TN75	F6T N8T
20	.5 .5	1.25	1.25	1.25	.005	.005	.250	205	A251175 A25NT125	N8H

Nominal	Ad- just ±V	Output Current Amps. at			Regulation		Ripple mV	(\$)		Case
Output Voltage					Load Line					
		40°C	55°C	71°C	± %	± %	RMS	Price	Model	Size
26 26	1 .5	.750 1.25	.750 1.25	.750 1.25	.1 .005	.05 .005	1 .250	155 205	B26TN75 A26NT125	F6T N8H
28	1	.700	.700	.700	.1	.05	1	155	B28TN70	F6T
28	.5	.800	.800	.800	.005	.005	.250	180	A28NT80	N8T
28	.5	1.25	1.25	1.25	.005	.005	.250	205	A28NT125	N8H
30	1	.500	.500	.500	.05	.05	1	155	B30TN50	F6T
30 30	.5 .5	.750 1.1	.750 1.1	.750 1.1	.005 .005	.005 .005	.250 .250	185 215	A30NT75 A30NT110	N8T N8H
32 32	1	.400	.400	.400	.05	.05	1	150 180	B32TN40 A32TN60	F6T N8T
34	1	.400	.400	.400	.05	.05	1	150	B34TN40	F6T
34	.5	1.1	1.1	1.1	.005	.005	.250	215	A34NT110	N8H
35	1	.400	.400	.400	.05	.05	1	150	B35TN40	F6T
35	.5	.600	.600	.600	.005	.005	.250	180	A35TN60	N8T
35	.5	1.1	1.1	1.1	.005	.005	.250	215	A35NT110	N8H
36 36	1 .5	.400 .600	.400 .600	.400 .600	.05 .005	.05 .005	1 .250	150 180	B36TN40 A36TN60	F6T N8T
36	.5	1.0	1.0	1.0	.005	.005	.250	215	A36NT100	N8H
38	1	.200	.200	.200	.05	.05	1	140	B38TN20	F6T
40	1	.400	.400	.400	.05	.05	1	160	B40TN40	F6T
40	.5	.750	.750	.750	.005	.005	.250	200	A40NT75	N8T
45	1	.400	.400	.400	.05	.05	1	170	B45TN40	F6T
45	.5	.600	.600	.600	.005	.005	.250	205	A45NT60	N8T
48 48	1 .5	.400 .500	.400 .500	.400 .500	.05 .005	.05 .005	1 .250	180 215	B48TN40 A48NT50	F6T N8T
50	1	.400	.400	.400	.05	.05	1	190	B50FT40	F6T
50	1	.450	.450	.450	.005	.005	.250	225	A50NT45	N8T
55	1	.200	.200	.200	.05	.05	1	160	B55FT20	F6T
55	1	.400	.400	.400	.005	.005	.250	225	A55NT40	N8T
60 60	1 1	.150 .350	.150 .350	.150 .350	.05 .005	.05 .005	1 .250	160 225	B60FT15 A60NT35	F6T N8T
65	1	.100	.100	.100	.005	.005	.230	155	B65FT10	F6T
65	1	.250	.250	.250	.05	.05	1	195	B65FT25	F8T
65	1	.270	.270	.270	.005	.005	.250	225	A65NT27	N8T
67	1	.100	.100	.100	.05	.05	1	155	B67FT10	F6T
70	1	.100	.100	.100	.05	.05	1	155	B70FT10	F6T
70	1	.250	.250	.250	.005	.005	.250	225	A70NT25	N8T
75	1	.200	.200	.200	.05	.05	1	190	B75FT20	F8T
75	1	.250	.250	.250	.005	.005	.250	225	A75NT25	N8T
80 80	1 1	.100 .200	.100 .200	.100 .200	.05 .05	.05 .05	1	165 190	B80FT10 B80FT20	F6T F8T
80	1	.250	.250	.250	.005	.005	.250	225	A80NT25	N8T
85	1	.250	.250	.250	.005	.005	.250	225	A85NT25	N8T
90	1	.100	.100	.100	.05	.05	1	170	B90FT10	F6T
90	1	.200	.200	.200	.05	.05	1	195	B90FT20	F8T
90	1	.250	.250	.250	.005	.005	.250	230	A90NT25	N8T
95 95	1 1	.200 .200	.200 .200	.200 .200	.05 .005	.05 .005	1 .250	200 225	B95FT20 A95NT20	F8T N8T
100	1	.100	.100	.100	.05	.05	1	190	B100FT10	F6T
100	1	.200	.200	.200	.05	.05	1	205	B100FT20	F8T
100	1	.200	.200	.200	.005	.005	.250	235	A100NT20	N8T
110	1	.100	.100	.100	.05	.05	1	190	B110FT10	F6T
115	1	.100	.100	.100	.05	.05	1	190	B115FT10	F6T
120 120	1 1	.050 .200	.050 .200	.050 .200	.05 .05	.05 .05	1 1	185 215	B120FT05 B120FT20	F6T F8T
120	1	.200	.200	.200	.005	.005	.250	235	A120NT20	N8T
125	1	.050	.050	.050	.05	.05	1	185	B125FT05	F6T
125	1	.200	.200	.200	.05	.05	1	215	B125FT20	F8T
125	1	.200	.200	.200	.005	.005	.250	235	A125NT20	N8T
150 150	1 1	.100 .100	.100 .100	.100 .100	.05 .005	.05 .005	1 .250	205 235	B150FT10 A150NT10	F8T N8T
100	•	.100			.000	.000	.200	200		

*or 2 mv, whichever is greater





WALL MOUNTING KITS ...\$8

These kits provide a way of mounting power supplies on a wall or panel when the other side of the mounting surface is inaccessible. Each kit consists of four aluminum brackets and four machine screws for fastening them to the power supply, effectively adding mounting flanges to the power supply.

For Gold Box and modular High Voltage power supplies:

GB8 Mounting Kit (#8-32 mounting holes)

Can be used on these case sizes:

CM6, CM9, CM13, CH11, CH16, DG5, DG6, DG9, G3, G5, G5D, G6, G9, G13, GT5, GT6, GT9, GT13, H8, H11, H16, HD345, HD355, HA349, HA359, HT11, HT16, M6, M9, M13, RM6, RW6 TG5, TG6, TG9, TG13, TH11, WG7, WM6, WM9, Y3, Y5, Y6, YH11, YA


For Narrow Profile power supplies:

<u>NP6 Mounting Kit</u> (#6-32 mounting holes) Can be used on these case sizes: AMC, CN8T, DN6B, DN6A, DN8A, DN8, F6T, F8T, N8T, WL9, WN6A, WN6B, WN8, WN8A, TN6T

<u>NP6L Mounting Kit</u> (#6-32 mounting holes)


Model NP6L consists of two brackets 1.5" long as shown above, and two 2.5" long brackets (to extend beyond heat sink).

Can be used on these case sizes: CN8H, N8H, TN8H



BOTTOM

REAR MOUNTING

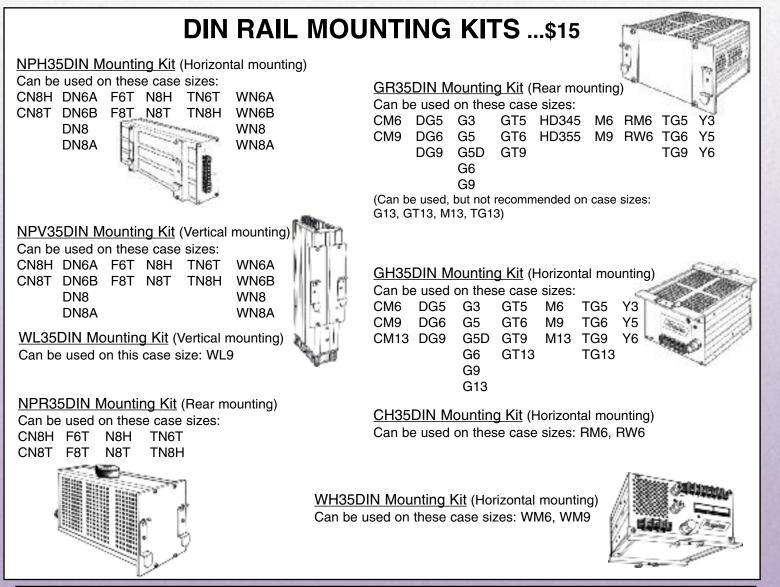





"Whenever I need a power supply for any project, I always check Acopian first. Your customer service is first rate, and I really like the fast, dependable shipping. The reliability of your products is an additional bonus – they seem to last forever."

> - Gudrun Kleist, Engineering Associate Lawrence Berkeley National Laboratory

About Acopian's 3 Day Shipment Guarantee:

In 1964, Acopian initiated its "3 Day Shipping Guarantee." Since then our product offerings have expanded to include many more lines of power supplies that ship within 3 Days as well as others that ship within 6 or 9 Days. These guarantees apply to every model in the Acopian catalog.

Our unique 3-day shipping guarantee has prompted many questions. Below are some of those most often asked:

What does Acopian's 3-day shipping promise mean?

It means that power modules listed in this catalog are shipped within 3 days after we receive your order. High Voltage, Redundant, Rack Mounting, Systems and certain Switching power supplies are shipped within 9 days.

Has Acopian ever failed to meet this promise? Never.

Do options affect shipping time?

The 230 volt input option and moisture/fungus-proofing option require two additional days. All other options do not affect shipping time.

Is the 3-day promise affected by quantity? Suppose we need 50 or 100 pieces? The 3-day promise applies to orders for five or less modules. (Two or less for 9-day items). If requested, Acopian will ship five pieces of a larger order in 3 days and, with consideration of your requirement, schedule the balance. (Since each shipment is processed and priced as a separate order, for lowest prices request

shipment in one lot.) What if I need four or five different models? Does the 3-day promise still apply?

Yes. Guaranteed 3-day shipment applies to one model or to a combination of models.

Do I have to ask for 3-day shipment of my order?

3-day shipment is automatic. In fact, you must tell us if you want the shipment delayed.

How long after you ship will I have the power supplies?

Transportation time varies with the carrier used. Unless otherwise requested, Acopian ships small orders by UPS Ground.

You say Acopian has never failed to meet the 3-day promise. How do you do it? Our facilities have been designed and equipped to meet our 3-day shipment promise. When your order is received, your power supplies are built specifically for you and shipped within three days. We do not ship from stock. (For this reason, we are unable to accept returns for credit.)

I've seen other power supply manufacturers advertise "same-day shipment." Isn't that better than 3-day shipment?

A typical vendor's "same-day shipment" advertisement can only be fulfilled if the power supplies you need are in stock. Otherwise, a four to six week delay is not unusual before inventory is replenished and your order is shipped.

Acopian's 3-day shipment promise applies to ALL 3 Day models (larger units ship within 9 Days) and is not dependent on the quantity in stock. We build each unit after the order for that unit is received. If an order is needed faster, often times we can ship in less than 3 days.

If you require shipment even earlier than our standard promise, just let us know, we can usually ship sooner. We welcome the opportunity to work with you.

ACOPIAN...

...answers your phone call with a live salesperson

No automated menus. The person who answers your call will courteously and promptly answer your questions, quote price and delivery, expedite your urgent requirements, and offer you immediate access to our engineers. Call toll free 800-523-9478.

...can customize power supplies for you

If a standard power supply does not meet all of your requirements, speak with one of our engineers. We can often modify the specifications, ratings and configuration of a supply. We can also combine several power supplies into a Multiple Output Power System with the operating features you specify (such as meters and switches) and ship it within 9 Days!

...has a 5-year warranty

This is typical: One of our customers sent us an old power supply with a note indicating that the supply had been in continuous use since 1972 (33 years!), but he had recently noticed that the output voltage was low. We found that the capacitors had dried up, replaced them and returned the supply to the customer, who thanked us and said he intends to keep using it. We focus on making power supplies that will last a long time. There are power supplies that cost less than ours, or that are smaller than ours, but you won't find any that last longer than ours. All too often, low-priced supplies are densely packed, run hot, have short lifetimes and short warranties. All Acopian metal-cased power products have a 5-year warranty, but you can expect them to last a lot longer.

Purchase Acopian... 3-day shipment, long lasting power supplies, and unsurpassed customer service.

"In my business, Acopian is referred to as bulletproof. It never fails and lasts forever."

> - Steve Andrews, President Technical Options, Inc.

"If Acopian made automobiles, I'd buy one without question."

- David A. Price, Research Technologist Georgia Tech Research Institute

ORDERING INFORMATION & Terms and Conditions

ACOPIAN SELLS FACTORY DIRECT WORLDWIDE: We do not use representatives or distributors. Contact Acopian for technical information or a quote.

WARRANTY: Acopian power supplies are warranted to be free from defects in material and workmanship for a period of five years (encapsulated devices, for one year) from date of original shipment. Acopian's obligation under this warranty is limited to repairing any power supply returned to the factory Service Department in Easton, PA and replacing any defective parts. Mini Encapsulated power supplies are not repairable. Authorization must be obtained from Acopian before a power supply may be returned for repair. Units must be well packed when shipping to Acopian; the repair of any damage incurred during shipment will be charged. Transportation charges are to be paid by the purchaser. A reinspection and handling charge will be applied to returned units found to have no defects. If a failure has been caused by misuse, operation in excess of specifications, or modification by the customer, repairs will be billed at cost; in such cases, a cost estimate will be submitted before work is started.

Acopian reserves the right to make changes or improvements in its products without incurring any obligation to install the same on products previously manufactured.

This warranty is in lieu of all other warranties, obligations, and liabilities, expressed or implied, and is the purchaser's exclusive remedy. Acopian makes no warranty, either express or implied, of merchantability, fitness for a particular purpose or otherwise. In no event shall Acopian be liable whether in contract, tort, or negligence, for special, indirect, incidental or consequential damages of any kind, including loss of business or profits, or any other losses incurred by the purchaser or any third party, the Customer's remedies being limited, at Acopian's option, to replacement, repair or credit at the price on the date of claim.

The validity, performance and construction of all terms and conditions and any sale made by Acopian shall be determined by the law of Pennsylvania, without regard to its conflict of law principles, and all parties to the transaction expressly consent to the jurisdiction of such courts and consent to the venue of the Court of Common Pleas for Northampton County, Pennsylvania.

PRICES: The prices shown are F.O.B. our factory; Easton, PA. or Melbourne, FL.. All prices and specifications are subject to change without notice. Minimum order is \$50.00.

TERMS: Net 30 days, subject to credit approval. Visa, MasterCard and American Express also accepted.

SHIPPING: Location permitting, small shipments are made by United Parcel Service, or by Parcel Post; larger shipments, by insured motor freight collect. Shipments can be made by air upon request. Risk of loss shall be F.O.B. Our Factory, even in cases where freight may be prepaid or allowed to destination by Acopian. If equipment is received in damaged condition, it is the customer's responsibility to contact the carrier and file a claim for damages.

TIME FOR DELIVERY: The time for delivery quoted by Acopian is the time required to ship from our plants. We will not be liable for delays in delivery caused by any reason beyond our control, including but not limited to acts of God, casualty, civil disturbance, labor disputes, transportation or supply difficulties, or any interruption of our facilities, and the quoted time for delivery shall be extended during the continuance of such conditions and for a reasonable time thereafter. In no event will Acopian be liable for any premium transportation, reprocurement, or similar costs incurred by the Customer as a result of conditions beyond Acopian's control resulting in Acopian's inability to deliver product in accordance with customer's requested delivery schedules.

QUANTITY DISCOUNTS: Discounts are available to quantity buyers and are dependent upon the order quantity and the manufacturing scheduling anticipated by the order, and apply only to the quantity and delivery ordered. Partial shipments are considered as separate orders for discounting purposes.

EXPORT ORDERS: A minimum export documentation charge of \$60.00 applies. (A minimum charge of \$25.00 applies on orders requiring customs forms for Canadian orders and for orders to certain U.S. territories.)

MOISTURE/FUNGUS PROOFING: Power supplies can be furnished with a moisture and fungus resistant varnish applied to interior surfaces. To order, add the suffix letter F to the model number. The additional cost is \$25.00 per output and requires two additional days. Not available on High Voltage, Mini Encapsulated, Rack Mounting, and Gold Box Switching models.

TAGGING: Maximum of 15 characters/spaces. Add \$10.00 to price.

TEST DATA: Cost, \$35.00 or 2% of order, whichever is greater.

SPECIAL MODELS/MODIFICATIONS: Cataloged models can be altered at the factory to meet special requirements. Contact the Applications Engineering Department to discuss your needs.

PARTS: The designs used in Acopian power supplies utilize standard components to the greatest practical extent. When replacements are required, the types originally used, or their equivalents, can usually be obtained most quickly from a local electronic components distributor.

Special components, such as transformers, are stocked at the factory warehouses. Contact the Applications Engineering Department for information on the parts required, referencing the model number of the power supply, the circuit designation of the component, and a description.

PURCHASE ORDER ACCEPTANCE: Orders are accepted subject to Acopian's Terms and Conditions. Any Terms and Conditions of any Purchaser's order, agreement, or understanding which are in addition to or inconsistent with Acopian's shall not be binding upon Acopian unless made in writing and accepted over the signature of an authorized officer of Acopian. Orders shall not be considered accepted until entered into production at our plant. Acopian reserves the right to refuse any order. All typographical and clerical errors are subject to correction by Acopian.

RETURNED GOODS: Acopian products are built on a per-order basis, and ordinarily no credit can be extended for their return. No goods will be accepted for return unless authorized in writing by Acopian.

CHANGES: The customer may, by a written notice, request changes within the general scope of the order, in the drawings, designs or specifications; method of shipment; and place of delivery. If any such change causes an increase or decrease in the cost, or the time required for the processing of any part of the order, an equitable adjustment shall be made in the price or delivery schedule, or both, and the order shall be modified in writing accordingly.

CANCELLATION: Suspension or cancellation of orders may be made only upon our written approval and on terms that will indemnify us against all loss.

OVERTIME: It is anticipated that any order will be processed during regular working hours on regular working days. If for any reason the Purchaser requests Acopian to process the order, or any portion of it, outside of such regular working hours, any overtime or other additional expense occasioned thereby shall be billed to and paid by the Purchaser as an extra cost. Acopian reserves the right to decline to process the order outside regular working hours.

CUSTOMER DELAY OF WORK: If the performance of all or any part of the work is delayed or interrupted by Customer's failure to act within the time specified (or within a reasonable time if no time is specified) and such act is not expressed or implied by the order, an adjustment shall be made in the cost of performance of the order caused by such delay or interruption and the order modified in writing accordingly. Adjustment will also be made in the delivery or performance dates and any other contractual provisions affected by such delay or interruption.

GOVERNMENT SPECIFICATIONS: Pricing is based upon industrial-grade construction, marking, packing, and packaging. Exception is taken to any MIL specifications, and to any requirements for the use of special forms, documentation other than quoted, and Government Source Inspection. Acopian must decline to quote on any other basis.

APPLICATIONS ASSISTANCE: Questions regarding the specifications, features, and use of any Acopian product should be directed to the Applications Engineering Department. A staff of power supply specialists will be pleased to assist you.

www.acopian.com - Online Ordering and Instant Quotes Online!

ALL ACOPIAN POWER SUPPLIES WWEAK OUXA MAAN MADE IN U.S.A.

00118111 Since 1957

Acopian Technical Company P.O. Box 638, Easton, PA 18044 • Phone: (610) 258-5441 • FAX: (610) 258-2842 Call toll free: (800) 523-9478 *(International: Country Code 01)*

PHOTO COURTESY OF THE ICECUBE PROJECT

"At Project IceCube, it's absolutely critical to have a good power supply.

The ice must be as pure and clear as possible. If the power to the ice top sensor system were to fail, we would risk the tank water freezing without being controlled, resulting in bubbles and impurities, and very much reducing the quality of ice and quality of information that we can see with our detectors. We chose Acopian power supplies to power our pumping and degassing systems because of their reputation for reliability. The people at Acopian met all of our highly demanding specifications and, despite very little time until our window to ship to the Pole, they met our schedule. We were 100% satisfied."

> Jim Baccus Cable System Manager Project IceCube (the international high-energy neutrino observatory being built and installed in the ice below South Pole Station)

The world's most demanding environments demand Acopian power systems.

Design your own Acopian power system online with the System Builder at www.acopian.com. Simply enter your requirements, and you'll receive a quotation for fully wired multiple-output power systems, without the need for you to prepare mechanical layouts or search through a power supply catalog.



ALL ACOPIAN POWER SUPPLIES MADE IN U.S.A.

Each system will be completely wired, tested and shipped within 9 days after receipt of the order. Choose Acopian – the power supplies of choice for the world's leading engineers.

<u>Acopian</u>

Acopian Technical Company

I-800-523-9478 • www.acopian.com